



CAR, SUV, 4X4, VAN TIRES

Product Catalogue 2025



Triangle Tyre Europe

The European headquarters of Triangle Tyre is located in the city center of Milan in Italy, and it was established as part of the globalization move into all regions worldwide started in 2016 after the listing at the Shanghai stock exchange.

The European team can efficiently support all Triangle customers across the region in the commercial, marketing and technical areas, thanks to its managers' long experience in the industry.

This strategic investment is allowing Triangle Tyre to be closer to the market place and better understand the customers' needs, react to market changes and feed the market demand with dedicated modern product lines.

Communication and marketing activities enable Triangle to increase the brand awareness and become more attractive in the highly competitive European scenario.

Triangle has a wide product portfolio for all European businesses from consumer to industrial tires.

For passenger and light truck tires the Company has a comprehensive line-up of products from ultra-high performance to the latest generation of SUV including winter, all-season and top class studdable tires.

On the commercial side, Triangle offers a broad range of medium and heavy truck tires for the transport industry.

Triangle has a full range of Off-The-Road (OTR) radial and bias tires, including Giant radial tires for the construction, mining and aggregates industries.

Triangle's strategic approach is to establish mutually beneficial relationships with key tire distributors in every country worldwide and with millions of consumers who trust its tires every day in all types of driving conditions.

Part of an innovative and growing global Company

Triangle Tyre Europe is part of one of the leading tire manufacturers worldwide.

The Group's total annual production exceeds 27 million tires which are sold into approximately 180 countries.

Triangle invests a large percentage of its revenue in Research and Development (R&D) and in the upgrading of its production facilities.

Triangle tires are innovative and high-quality thanks to the Company's unswerving commitment to Research and Development, as well as utilization of advanced manufacturing technologies.

The Company boasts more than 360 patents, with research centers in Weihai (China), and Akron (USA).

Triangle's fully robotized production facility for passenger car tires is recognized as one of the benchmarks within the tire industry. Triangle's "smart" plants are in fact largely controlled by computer-integrated manufacturing systems to ensure the best quality control.

The Company is working on new technologies, new compounds and safety systems for products able to face every road condition, temperature and potential damages.

Triangle Tyre Company Overview

Headquartered in Weihai China.

Founded in 1976, Triangle Tyre has become a leading tire manufacturer in China and one of the largest in the world.

5,723

Employees
from all over the world

4

Manufacturing plants
in China

2

R&D and Technical
Centers in China and USA

180

Countries-Global
presence

Triangle Tires Production

Current production output

20 million PCR units

6,5 million TBR units

0,38 million Earth Mover units

Future production capacity

30 million PCR units

7 million TBR units

0,5 million Earth Mover units

Stock Exchange listing

Triangle Tyre is among the largest tire manufacturers in the world and the 4th largest worldwide for OTR tires. Listed on the Shanghai Stock Exchange in September 2016.



Original Equipment

PCR



TBR



OTR





- ★ Headquarters
- 📍 Offices
- ⦿ R&D
- ◇ Tire manufacturing facilities

R&D - China and USA

- Product development for replacement market
- OE for domestic vehicle manufacturers
- Business intelligence of current and future tire trends
- Developing advanced tire technology
- Technical interface for Marketing and Sales

Manufacturing Excellence

World Most Advanced Manufacturing in PCR new plant

- Latest in manufacturing plant technology
- Modern operations for existing and new facilities

State-of-the-Art equipment and automation

- Green, clean, lean and safe manufacturing: Huamao solar panels arrays and water recycling system
- Automatic Building Machines: Upgraded VMI Exxium
- Cold Mixing Technology
- Production line with full integration of IT and intelligent solutions
- Automatic Warehouse System



Product Range | SUMMER

UHP



EffeX Sport TH202



PAGE
14

TH201



PAGE
18

HP



ReliaX Touring TE307



PAGE
22

AdvanteX TC101



PAGE
24

SUV



EffeX Sport TH202



PAGE
28

TH201



PAGE
30

AdvanteX SUV
TR259



PAGE
32

4X4 ALL TERRAIN



AgileXAT

TR292



PAGE
38

4X4 MUD TERRAIN



GripXMT

TR281



PAGE
44

VAN



ConneXVAN

TV701



PAGE
48

TR652
MILEAGE PLUS



PAGE
50

Product Range | CAR & SUV ALL SEASON / WINTER

ALL SEASON CAR & SUV



SeasonX

TA01



PAGE
54

ALL SEASON VAN



SeasonX VAN

TA702



PAGE
60

WINTER CAR



EffeX Winter

TW421



PAGE
64

WinterX

TW401



PAGE
66

PL02
SNOWLINK



PAGE
70

TR777
SNOWLION



PAGE
72

WINTER SUV



EffeX Winter

TW421



PAGE
76

WinterX

TW401



PAGE
78

PL02
SNOWLINK



PAGE
80

TR777
SNOWLION



PAGE
82

WINTER VAN



**LL01
SNOWLINK**



PAGE
86

TR737



PAGE
88

FRICTION



**PL01
SNOWLINK**



PAGE
92

STUDDABLE



IcelynX

TI501



PAGE
98

EffeX[®]Sport TH202

PAGE 14




TH201

PAGE 18






- Ultimate UHP generation
- High speed handling
- Superior grip and steering precision in any driving condition
- Short braking distance for optimal control on wet and dry roads



Performance

Wet Braking

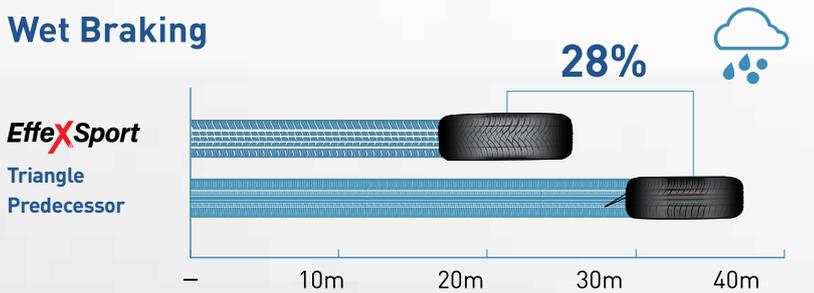


• Data represents braking distance(meters).

Wet Handling




• Data represents lap time(seconds).

Features and Benefits

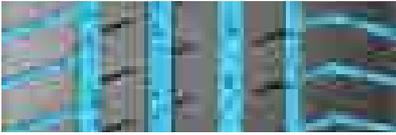

A modern asymmetric pattern with four wide longitudinal grooves

To minimize aquaplaning and additional diagonal elements to enhance the water evacuation.

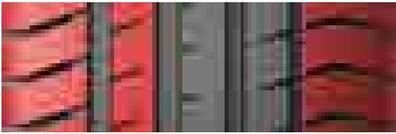


Innovative profile with optimized footprint and large rigid blocks

For high speed handling and braking performance.



New generation compound

To maximize the grip in any driving condition, without compromising on rolling resistance performance.

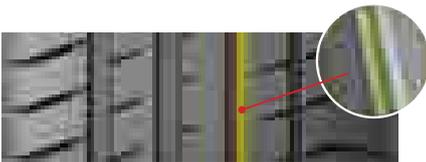

Triangle's longitudinal groove mute-technology

To ensure the highest level of acoustic comfort and offer the quietest driving experience.

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	275	30	20	97	Y	XL	D	A	B	73
CAR	265	30	20	94	Y	XL	D	A	B	73
CAR	255	30	20	92	Y	XL	D	A	B	73
CAR	245	30	20	95	Y	XL	D	A	B	72
CAR	225	30	20	85	Y	XL	D	A	B	72
CAR	275	30	19	96	Y	XL	D	A	B	73
CAR	265	30	19	93	Y	XL	D	A	B	73
CAR	255	30	19	91	Y	XL	D	A	B	73
CAR	275	35	20	102	Y	XL	D	A	B	73
CAR	265	35	20	99	Y	XL	D	A	B	73
CAR	255	35	20	97	Y	XL	D	A	B	73
CAR	245	35	20	95	Y	XL	D	A	B	72
CAR	235	35	20	92	Y	XL	D	A	B	72
CAR	225	35	20	90	Y	XL	D	A	B	72
CAR	275	35	19	100	Y	XL	D	A	B	73
CAR	265	35	19	98	Y	XL	D	A	B	73
CAR	255	35	19	96	Y	XL	D	A	B	73
CAR	245	35	19	93	Y	XL	D	A	B	72
CAR	235	35	19	91	Y	XL	D	A	B	72
CAR	225	35	19	88	Y	XL	D	A	B	72
CAR	215	35	19	85	Y	XL	D	B	B	72
CAR	265	35	18	97	Y	XL	D	A	B	73
CAR	255	35	18	94	Y	XL	D	A	B	73
CAR	245	35	18	92	Y	XL	D	A	B	72
CAR	215	35	18	84	Y	XL	D	B	B	72
CAR	275	40	22	107	Y	XL	C	A	B	73
CAR	275	40	21	107	Y	XL	C	A	B	73
CAR	255	40	21	102	Y	XL	C	A	B	73
CAR	265	40	20	104	W	XL	C	A	B	73
CAR	245	40	20	99	Y	XL	C	A	B	72
CAR	275	40	19	105	Y	XL	C	A	B	73
CAR	255	40	19	100	Y	XL	C	A	B	73
CAR	245	40	19	98	Y	XL	D	A	B	72
CAR	235	40	19	96	Y	XL	C	A	B	72
CAR	225	40	19	93	Y	XL	D	B	B	72
CAR	255	40	18	99	Y	XL	C	A	B	73
CAR	245	40	18	97	Y	XL	D	A	B	72
CAR	235	40	18	95	Y	XL	D	A	B	72

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	225	40	18	92	Y	XL	D	B	B	72
CAR	215	40	18	89	Y	XL	D	B	B	72
CAR	245	40	17	95	Y	XL	D	A	B	72
CAR	215	40	17	87	Y	XL	D	B	B	72
CAR	205	40	17	84	W	XL	D	B	B	72
CAR	205	40	16	83	W	XL	D	B	B	72
CAR	275	45	21	110	Y	XL	C	A	B	73
CAR	285	45	20	112	Y	XL	C	A	B	75
CAR	275	45	19	108	Y	XL	C	A	B	73
CAR	245	45	19	102	Y	XL	D	A	B	72
CAR	235	45	19	99	W	XL	D	A	B	72
CAR	225	45	19	96	Y	XL	D	B	B	72
CAR	255	45	18	103	Y	XL	D	A	B	73
CAR	245	45	18	100	Y	XL	D	A	B	72
CAR	235	45	18	98	Y	XL	D	A	B	72
CAR	225	45	18	95	Y	XL	D	B	B	72
CAR	215	45	18	93	Y	XL	C	B	B	72
CAR	255	45	17	102	Y	XL	D	A	B	73
CAR	245	45	17	99	Y	XL	D	A	B	72
CAR	235	45	17	97	Y	XL	D	A	B	72
CAR	225	45	17	94	Y	XL	D	A	B	72
CAR	215	45	17	91	Y	XL	D	B	B	72
CAR	205	45	17	88	Y	XL	D	B	B	72
CAR	215	45	16	90	V	XL	D	B	B	72
CAR	205	45	16	87	W	XL	D	B	B	72
CAR	195	45	16	84	W	XL	D	B	B	72
CAR	275	50	21	113	W	XL	B	A	B	73
CAR	275	50	19	112	W	XL	C	A	B	73
CAR	245	50	19	105	Y	XL	C	A	B	72
CAR	235	50	19	103	W	XL	C	A	B	72
CAR	235	50	17	100	Y	XL	D	A	B	72
CAR	225	50	17	98	Y	XL	C	B	B	72
CAR	215	50	17	95	Y	XL	C	B	B	72
CAR	205	50	17	93	Y	XL	D	B	B	72
CAR	225	55	17	101	Y	XL	C	B	B	72
CAR	215	55	17	98	Y	XL	C	B	B	72
CAR	205	55	17	95	W	XL	C	B	B	72
CAR	215	55	16	97	W	XL	C	B	B	72
CAR	205	55	16	91	V	SL	C	B	B	71

TH201


- Is the premium UHP summer tire that provides drivers with confidence and control to help them master the road
- Asymmetric pattern design for maximum cornering stability, straight stability and dry braking, offering the ultimate driving experience
- Balanced performances on dry and wet roads, combined with excellent driving control, comfort of ride and superb acoustic comfort



Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	255	30	22	95	Y	XL	C	C	B	73
CAR	275	30	21	98	Y	XL	C	C	B	73
CAR	265	30	20	94	Y	XL	D	C	B	73
CAR	295	30	19	100	Y	XL	C	C	B	75
CAR	265	35	22	102	Y	XL	C	C	B	73
CAR	225	50	16	96	W	XL	C	C	B	72

Features and Benefits



Three main central grooves with assisted lateral oblique groove

To maximize water drainage, resulting in good aquaplaning and wet grip performance.



Three silencer slots, high angle CL radial groove

For groove resonance reduction, resulting in reduced new and worn tire noise.



Asymmetric design with optimized pitch sequence

For improved management of lateral forces, resulting in improved cornering stability performance.

Optimized tread contact patch and large-block design

For large and even contact surface, resulting in improved dry handling performance.

ReliaX Touring TE307

PAGE 22



AdvanteX TC101

PAGE 24





- High level of driving comfort
- Precise handling in all road conditions
- Excellent mileage
- Low fuel consumption



SUMMER



TOURING




SAFETY



COMFORT



Features and Benefits

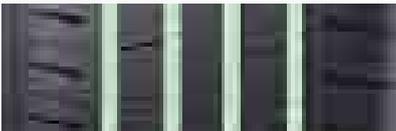

Symmetric pattern design with four main longitudinal grooves

To reduce aquaplaning and improve wet handling, braking performances and safety.



Closed shoulder design and a variable-pitch tread

To maximize the comfort and reduce the noise.




Crown-optimized 3-segment arc profile

To offer excellent handling.



Latest generation compound formula

To grant an exceptional mileage and tire durability.



Unique asymmetric groove angles

Combined with the steel blade design, for extreme grip in all weather conditions.

Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	205	50	17	93	W	XL	D	B	B	72
CAR	205	50	16	91	W	XL	C	B	B	72
CAR	195	50	16	88	V	XL	D	B	B	72
CAR	195	50	15	82	V		D	B	B	71
CAR	225	55	16	99	W	XL	C	B	B	72
CAR	215	55	16	97	W	XL	C	B	B	72
CAR	205	55	16	91	V		C	B	B	71
CAR	205	55	16	94	W	XL	C	B	B	72
CAR	195	55	16	87	V		D	B	B	71
CAR	185	55	16	87	V	XL	C	B	B	71
CAR	175	55	16	80	H		D	C	B	70
CAR	195	55	15	85	V		D	B	B	71
CAR	185	55	15	82	V		D	B	B	70
CAR	225	60	16	102	V	XL	C	B	B	72
CAR	215	60	16	99	V	XL	C	B	B	72
CAR	205	60	16	96	V	XL	C	B	B	72
CAR	195	60	16	89	V		C	B	B	71
CAR	185	60	16	86	H		D	B	B	70
CAR	195	60	15	88	V		C	B	B	71
CAR	185	60	15	88	H	XL	D	B	B	71
CAR	175	60	15	81	H		D	C	B	70
CAR	205	65	16	95	H		C	B	B	71
CAR	205	65	15	94	V		D	B	B	71
CAR	195	65	15	91	H		C	B	B	71
CAR	195	65	15	95	V	XL	C	B	B	72
CAR	185	65	15	88	H		D	B	B	70
CAR	175	65	15	84	H		D	C	B	70
CAR	165	65	15	85	H	XL	D	C	B	71
CAR	175	65	14	86	H	XL	D	C	B	71
CAR	165	65	14	79	H		D	C	B	70
CAR	205	70	15	96	H		C	B	B	71

- Advantex TC101 is the pattern designed to blend performance, comfort and safety
- The mix of new tread pattern and compound technology leads to an exceptional all round performer in all conditions



SUMMER



COMFORT



HANDLING




FUEL SAVING




Performance

Wet Braking

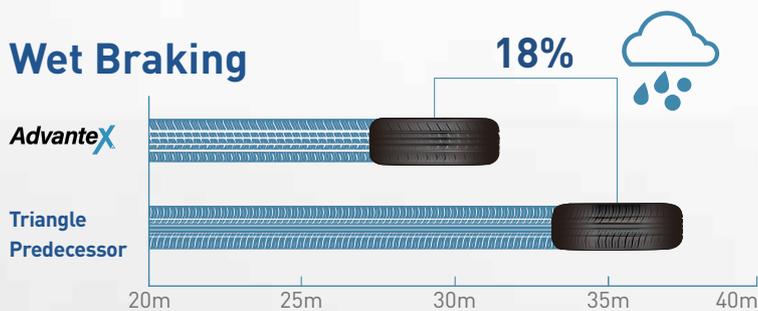

Dry Braking

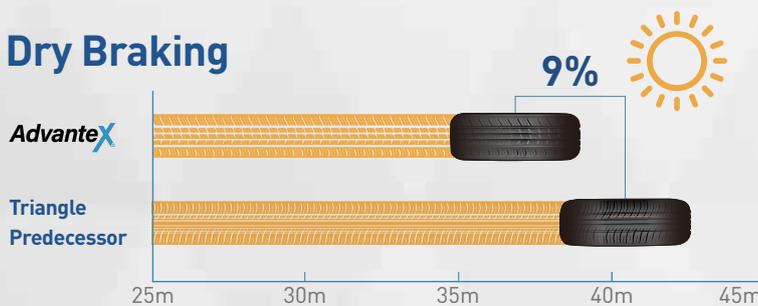

Features and Benefits



Four deep circumferential grooves

For excellent water drainage and reduced aquaplaning, resulting in improved wet handling and braking.



Large shoulder blocks with unique shape

For enhanced shoulder stiffness and improved stability, resulting in better cornering in wet and dry conditions.



High sipes density

For increased biting edges and water dispersion, resulting in improved wet handling and braking.



Closed groove design

Traps noise generated from the center of the tire, resulting in a quieter and more comfortable ride.



Functionalized polymer and high content silica in combination with white carbon black

For a reduction in tread deformation and lower rolling resistance, resulting in improved traction, wet handling, braking and fuel efficiency.



Optimized high density polyester matrix structure design

For more robust and stable carcass, resulting in better steering and handling response.

Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	185	45	15	75	V	-	D	C	B	70
CAR	245	50	17	99	Y	-	D	C	B	71
CAR	185	50	16	81	V	-	D	C	B	70
CAR	195	55	20	95	H	XL	C	C	B	72
CAR	205	55	19	97	V	XL	D	C	B	72
CAR	205	55	15	88	W	-	D	C	B	71
CAR	195	65	15	91	V	-	D	C	B	71

EffeX Sport TH202

PAGE 28



TH201

PAGE 30



AdvanteX SUV TR259


PAGE 32





EffeX Sport TH202

- Perfect choice for Sporty SUV's
- Designed to ensure high levels of performance and safety on and off road
- Rely on safe braking thanks to latest generation compound
- Ideal tire for drivers seeking grip on/off road, without compromising on rolling resistance



Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	315	35	20	110	Y	XL	C	A	B	75
SUV	265	40	22	106	W	XL	D	A	B	73
SUV	275	40	20	106	Y	XL	C	A	B	73
SUV	255	40	20	101	Y	XL	C	A	B	73
SUV	285	45	21	113	W	XL	C	A	B	75
SUV	265	45	21	108	W	XL	C	A	B	73
SUV	275	45	20	110	Y	XL	C	A	B	73
SUV	265	45	20	108	Y	XL	C	A	B	73
SUV	255	45	20	105	Y	XL	C	A	B	73
SUV	245	45	20	103	Y	XL	C	A	B	72
SUV	235	45	20	100	Y	XL	C	A	B	72
SUV	285	45	19	111	Y	XL	C	A	B	75
SUV	255	45	19	104	Y	XL	C	A	B	73
SUV	265	50	20	111	Y	XL	C	A	B	73
SUV	255	50	20	109	Y	XL	C	A	B	73
SUV	245	50	20	105	V	XL	C	A	B	72
SUV	235	50	20	104	W	XL	B	A	B	72
SUV	265	50	19	110	Y	XL	C	A	B	73
SUV	255	50	19	107	Y	XL	C	A	B	73
SUV	245	50	18	104	Y	XL	D	A	B	72
SUV	225	50	18	99	W	XL	D	B	B	72
SUV	255	55	20	110	W	XL	C	A	B	73
SUV	235	55	20	105	W	XL	C	A	B	72
SUV	255	55	19	111	W	XL	C	A	B	73
SUV	235	55	19	105	W	XL	C	A	B	72
SUV	235	55	18	104	W	XL	C	A	B	72
SUV	225	55	18	102	Y	XL	C	B	B	72
SUV	215	55	18	99	W	XL	C	B	B	72
SUV	235	55	17	103	W	XL	C	A	B	72

TH201

- Sport performance for modern SUV's up to 24 inch
- Driving control and comfort
- Excellent handling performance
- Wet grip and excellent water drainage due to ultimate tread design with central and oblique lateral grooves



Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	305	35	24	112	W	XL	C	C	B	75
SUV	295	35	24	110	W	XL	C	C	B	75
SUV	295	35	21	107	Y	XL	C	C	B	75
SUV	275	40	22	108	Y	XL	C	C	B	73
SUV	275	40	21	107	Y	XL	C	C	B	73
SUV	265	40	21	105	Y	XL	C	C	B	73
SUV	255	40	21	102	Y	XL	C	C	B	73
SUV	275	45	21	110	Y	XL	C	C	B	73
SUV	275	45	19	108	Y	XL	C	C	B	73
SUV	255	50	18	106	V	XL	C	C	B	73


AdvanteX SUV TR259

- Excellent all-round performer designed for modern SUV's
- The mix of new tread pattern and compound technology applied to the fast-growing segment of SUV has brought to comfort, fuel efficiency and braking performance in all road conditions




Performance


Wet Braking

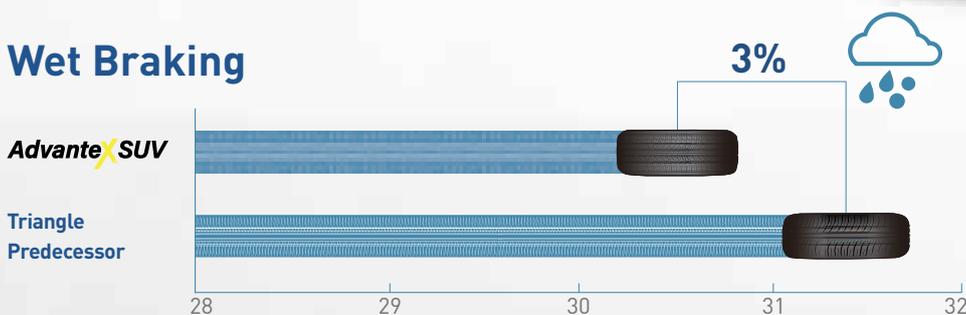

Dry Braking

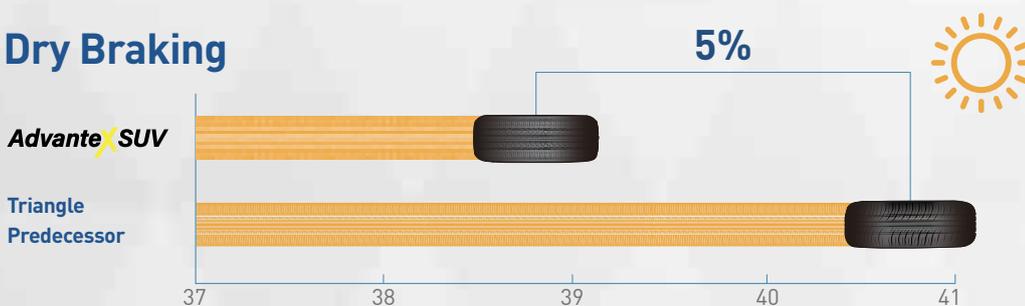

Features and Benefits



Five rib tread design

For maximum surface contact and even bear loading, resulting in balanced wet and dry handling performance.



Additional shoulder and intermediate rib slot

For improved shoulder stability and better water drainage efficiency, resulting in confident wet/dry and light snow handling performance.



Closed and supported shoulder slots

For a balanced wet/dry noise performance and handling, resulting in a quieter and more comfortable ride.



Strategically placed sipe/blade density

For increased biting edges and water dispersion, resulting in improved wear performance with comfort and good wet/light snow performance.



Reinforced high reversed carcass structure

For a reduction in carcass deformation and enhanced sidewall strength, resulting in improved durability and driving stability.



Optimized silica tread formula compound

For lower rolling resistance, reduced irregular wear and shorter braking distance, resulting in improved fuel efficiency, quiet and comfortable driving.

Product Specifications



Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	275	45	21	110	Y	XL	C	C	B	73
SUV	255	45	21	102	W	XL	C	C	B	72
SUV	285	50	20	116	W	XL	C	C	A	72
SUV	275	50	20	113	W	XL	C	C	B	73
SUV	265	50	20	111	Y	-	B	C	B	73
SUV	255	50	19	107	V	XL	D	C	A	70
SUV	235	50	18	97	V	-	D	C	B	71
SUV	225	50	18	99	W	XL	C	C	B	72
SUV	215	50	18	92	W	-	D	C	B	71
SUV	275	55	20	117	W	XL	C	C	B	73
SUV	255	55	19	111	W	XL	C	C	B	73
SUV	235	55	19	105	W	XL	C	C	B	72
SUV	225	55	19	99	V	-	D	C	B	71
SUV	255	55	18	109	W	XL	C	C	B	73
SUV	235	55	18	104	V	XL	D	C	B	72
SUV	225	55	18	102	W	XL	C	C	B	72
SUV	215	55	18	95	V	-	D	C	B	71
SUV	275	55	17	109	V	-	C	C	B	70
SUV	235	55	17	103	V	-	D	C	B	72
SUV	275	60	20	115	H	-	C	C	B	72
SUV	255	60	19	109	V	-	C	C	B	72
SUV	265	60	18	114	V	XL	C	C	B	73
SUV	255	60	18	112	H	XL	C	C	B	73
SUV	245	60	18	105	H	-	C	C	B	71
SUV	235	60	18	107	W	XL	C	C	B	72
SUV	225	60	18	104	W	XL	C	C	B	72
SUV	275	60	17	110	H	-	C	C	B	72
SUV	235	60	17	102	V	-	D	C	B	71

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	225	60	17	99	V	-	D	C	B	71
SUV	215	60	17	96	H	-	D	C	B	71
SUV	235	60	16	100	H	-	D	C	B	71
SUV	275	65	18	116	H	-	C	C	B	72
SUV	265	65	18	114	H	-	C	C	B	72
SUV	255	65	18	111	H	-	C	C	B	72
SUV	235	65	18	106	H	-	D	C	B	71
SUV	245	65	17	111	H	XL	C	C	B	72
SUV	235	65	17	108	V	XL	C	C	B	72
SUV	225	65	17	106	V	XL	C	C	B	72
SUV	215	65	17	99	V	-	D	C	B	71
SUV	215	65	16	102	V	XL	D	C	B	72
SUV	255	70	18	116	H	XL	C	C	B	73
SUV	265	70	17	115	H	-	C	C	B	72
SUV	245	70	17	114	H	XL	C	C	B	72
SUV	265	70	16	112	H	-	D	C	B	72
SUV	245	70	16	111	H	XL	C	C	B	72
SUV	235	70	16	106	H	-	D	C	B	71
SUV	225	70	16	103	H	-	D	C	B	71
SUV	215	70	16	100	H	-	D	C	B	71
SUV	255	70	15	108	H	-	C	C	B	72
SUV	235	70	15	107	H	XL	D	C	B	72
SUV	225	70	15	100	H	-	D	C	B	71
SUV	265	75	16	116	S	-	C	C	B	72
SUV	245	75	16	114/111	S	-	D	C	B	72
SUV	225	75	15	106	H	XL	D	C	B	72
SUV	215	75	15	100	H	-	D	C	B	71
SUV	205	75	15	102	H	XL	D	C	B	72
SUV	235	85	16	120/116	S	-	D	C	B	72
SUV	215	85	16	115/112	S	-	D	C	B	72

AgileX**AT** TR292

PAGE 38





- The AgileX All Terrain tire: toughness , traction and mileage
- The tire developed to address the growing market for balanced on and off-road performance and for consumers wanting the flexibility of great on and off-road mileage
- The AgileX All Terrain delivers agility in all conditions
- Full range able to cover all light truck sizes



4X4



ALL TERRAIN



ROBUST



RIM

15" - 20"




RATIO

50 - 85



Features and Benefits



Optimized belt angle and width

For better footprint distribution, resulting in increased tread stability with better handling.




Strengthened shoulder block with intermediate slot design

For increased rigidity, resulting in reduced ride noise and avoiding uneven wearing.



Large shoulder slots design

For increased gripping and dispensing efficiency, resulting in confident off-road traction performance.



Four main rib grooves design, deep sipe and wide shoulder

For efficient water dispersion and drainage, resulting in good handling and wet braking performance.



Balanced on/off road compound

For absorbing road vibration and balanced performance on paved / unpaved roads, resulting in excellent driving performance and low noise.



High sidewall ply turn-up

For a reduction in carcass deformation and enhanced sidewall strength, resulting in increased resistance to sidewall damage.

Product Specifications



Segment	Width	Ratio	Rim	LI	SI	XL				Noise
4X4	265	50	20	111	T	-	D	C	B	73
4X4	275	55	20	117	T	XL	D	C	B	72
4X4	255	55	18	109	H	XL	D	C	B	73
4X4	275	60	20	115	T	-	D	C	B	72
4X4	265	60	18	114	H	XL	D	C	B	73
4X4	235	60	18	103	T	-	D	C	B	71
4X4	205	60	15	91	H	-	D	C	B	71
4X4	275	65	18	116	H	-	D	C	B	73
4X4	265	65	17	112	S	-	D	C	B	72
4X4	255	65	17	110	H	-	D	C	B	72
4X4	245	65	17	111	T	XL	D	C	B	72
4X4	235	65	17	104	T	-	D	C	B	71
4X4	225	65	17	106	T	XL	D	C	B	72
4X4	235	65	16	107	T	-	D	C	B	72
4X4	205	65	15	94	H	-	D	C	B	71
4X4	285	70	17	117	T	-	D	C	B	72
4X4	275	70	17	114/110	T	-	D	B	B	72
4X4	265	70	17	115	S	-	D	C	B	72
4X4	265	70	17	121/118	S	-	D	B	B	71
4X4	245	70	17	110	S	-	D	C	B	71
4X4	245	70	17	114/110	S	-	D	B	B	72
4X4	225	70	17	108	S	-	D	C	B	72
4X4	265	70	16	112	S	-	D	C	B	72
4X4	265	70	16	117/114	S	-	D	B	B	72
4X4	255	70	16	115	T	XL	C	C	B	73
4X4	245	70	16	111	S	XL	D	C	B	72
4X4	235	70	16	106	S	-	D	C	B	71

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
4X4	225	70	16	103	T	-	D	C	B	71
4X4	215	70	16	100	T	-	D	C	B	71
4X4	235	70	15	103	H	-	D	C	B	71
4X4	205	70	15	96	T	-	D	C	B	71
4X4	245	75	17	112	R	-	D	C	B	71
4X4	265	75	16	116	S	-	D	C	B	72
4X4	245	75	16	111	Q	-	D	C	B	71
4X4	245	75	16	120/116	S	-	D	B	B	72
4X4	225	75	16	108	Q	XL	D	C	B	72
4X4	225	75	16	115/112	T	-	D	B	B	72
4X4	235	75	15	109	S	XL	D	C	B	72
4X4	235	75	15	110/107	S	-	D	B	B	72
4X4	225	75	15	110/108	S	-	D	B	B	72
4X4	215	75	15	100	S	-	D	C	B	71
4X4	205		16	110/108	T	-	D	B	B	72
4X4	235	85	16	120/116	Q	-	D	B	B	72
4X4	215	85	16	115/112	R	-	D	B	B	72
4X4	31	10.5	15	109	S	-	C	B	B	72
4X4	30	9.5	15	104	S	-	D	B	B	72

GripX^{MT} TR281

PAGE 44





- Reinforced shoulder block design with large oblique grooves for improved driving control, great traction in sandy and muddy conditions
- Shoulder and sidewall for greater protection from rocks and fallen branches
- Wide zig-zag grooves for superior off-road performance for enhanced climbing ability and steering stability on and off road
- Optimized silica compound for reduced tread deformation



Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL	P.O.R. (Professional Off Road)
4X4	245	75	16	120/116	Q	-	✓
4X4	225	75	16	115/112	Q	XL	✓
4X4	235	75	15	104/101	Q	-	✓
4X4	235	85	16	120/116	Q	-	✓
4X4	30	9.5	15	104	Q	-	✓

Features and Benefits



Aggressive block design with large shoulder grooves

For extreme off-road grip, resulting in superior off-road performance.



Strategically placed stone ejectors

For release of trapped stones and mud, resulting in high traction and preventing damage.




Stair step block face design

For aggressive gripping and climbing capability, resulting in greater bite for off-road traction in sandy and muddy conditions.



Reinforced high strength carcass structure

For enhanced climbing ability and steering stability on and off-road, resulting in effective prevention of damage.



New advanced tread compound featuring functional polymers in combination with natural rubber

For increased durability, self cleaning and high carrying capacity, resulting in improved resistance to tearing and punching.



High sidewall turn-up

For improved sidewall strength, resulting in prevention of sidewall damage.

ConneXVAN TV701

PAGE 48



MILEAGE PLUS TR652

PAGE 50





- Developed for the modern light Commercial vehicles with high load capacities and powerful engines
- High-density continuous block pattern able to reduce the tread deformation and providing excellent mileage performance
- Special groove strengthening design to prevent groove cracking
- Excellent acoustic comfort




Product Specifications

Segment	Width	Ratio	Rim	LI	SI				Noise
VAN	215	60	17	109/107	T	B	B	B	72
VAN	215	60	16	103/101	H	C	B	B	72
VAN	215	60	16	108/106	T	C	B	B	72
VAN	195	60	16	99/97	H	C	B	B	72
VAN	235	65	16	115/113	S	B	B	B	72
VAN	225	65	16	112/110	T	B	B	B	72
VAN	215	65	16	109/107	T	C	B	B	72
VAN	205	65	16	107/105	T	C	B	B	72
VAN	195	65	16	104/102	T	C	B	B	72
VAN	215	65	15	104/102	T	C	B	B	72
VAN	205	65	15	102/100	T	C	B	B	72
VAN	185	65	15	97/95	S	C	B	B	72
VAN	175	65	14	90/88	T	D	B	B	72
VAN	215	70	16	108/106	T	C	B	B	72
VAN	255	70	15	112/110	S	C	B	B	72
VAN	225	70	15	112/110	S	C	B	B	72

Segment	Width	Ratio	Rim	LI	SI				Noise
VAN	215	70	15	109/107	S	C	B	B	72
VAN	205	70	15	106/104	S	C	B	B	72
VAN	195	70	15	104/102	S	C	B	B	72
VAN	175	70	14	95/93	T	D	B	B	72
VAN	165	70	14	89/87	S	D	B	B	72
VAN	225	75	16	121/120	S	B	B	B	72
VAN	215	75	16	116/114	S	C	B	B	72
VAN	205	75	16	113/111	T	C	B	B	72
VAN	195	75	16	110/108	T	C	B	B	72
VAN	185	75	16	104/102	T	C	B	B	72
VAN	215	75	15	100/97	S	C	B	B	72
VAN	195		15	106/104	S	C	B	B	72
VAN	185		15	103/102	R	C	B	B	72
VAN	215		14	112/110	R	C	B	B	72
VAN	195		14	106/104	R	B	B	B	72
VAN	185		14	102/100	S	D	B	B	72

Features and Benefits

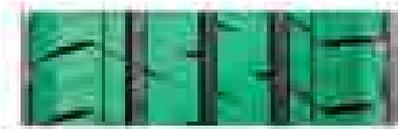


High-density continuous block pattern

More tread rubber and less tread deformation, resulting in increased wear resistance.



Special grooves design

Reinforced groove strength, resulting in improved load capacity and reduction in groove cracking.

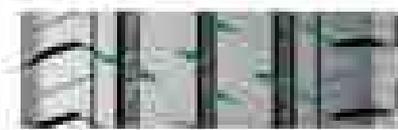


Visual digital noise filtering technology with lateral oblique grooves

For reduced pattern noise, resulting in good acoustic comfort.



Optimized groove design

Enhanced water drainage, resulting in excellent braking and handling in wet conditions.

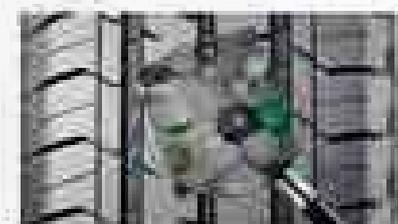

Multi-functional rubber with high reinforcing filler compound design

Cooler running and improved wear resistance, whilst delivering excellent wet breaking. Excellent mileage in varying road and surface conditions coupled with improved fuel economy and safety.

MILEAGE PLUS TR652

- Light commercial vehicle tire designed to meet driver expectations for high durability and value-added products
- Deeper shoulder grooves provides the suitability for four seasons
- Steel blade sipe design providing excellent grip and control in wet road condition



Product Specifications

Segment	Width	Ratio	Rim	LI	SI				Noise
VAN	225	65	16	112/110	R	C	C	B	72
VAN	215	65	16	109/107	T	C	C	B	72
VAN	205	65	16	107/105	T	C	C	B	72
VAN	195	65	16	104/102	T	D	C	B	72
VAN	195	65	15	98/96	T	D	C	B	72
VAN	175	65	14	90/88	T	D	C	B	72
VAN	225	70	15	112/110	R	D	C	B	72
VAN	215	70	15	109/107	R	C	C	B	72
VAN	205	70	15	106/104	S	D	C	B	72
VAN	195	70	15	104/102	S	C	C	B	72
VAN	225	75	16	116/114	Q	C	C	B	72
VAN	215	75	16	116/114	S	D	C	B	72
VAN	205	75	16	110/108	R	C	C	B	72
VAN	195	75	16	107/105	R	D	C	B	72
VAN	215	75	14	112/110	R	D	C	B	72
VAN	205		14	109/107	Q	C	C	B	72
VAN	185		14	102/100	R	D	C	B	72
VAN	175		14	99/98	Q	D	C	B	72
VAN	165		14	91/90	S	D	C	B	72
VAN	165		13	94/93	Q	D	C	B	72



SeasonX TA01

PAGE 54





- The SeasonX is an all season tire developed to simplify ownership in geographies where winter fitment is required by law and/or necessary
- Providing excellent performance in both summer and winter conditions, the SeasonX features a combination of state-of-the-art tread, compounding and carcass design



ALL SEASON



HANDLING



WET BRAKING



TRACTION ON SNOW AND ICE




NEW SILICA COMPOUND




Performance


Wet Braking

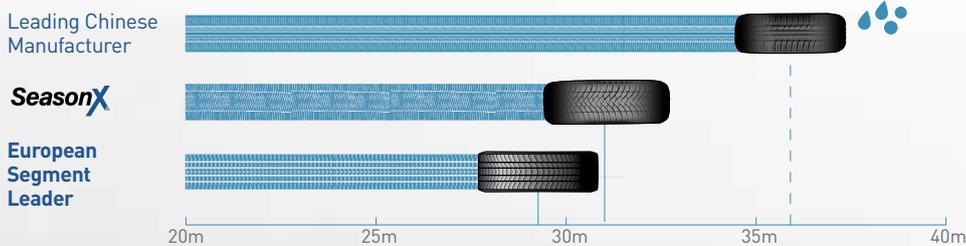

Dry Braking

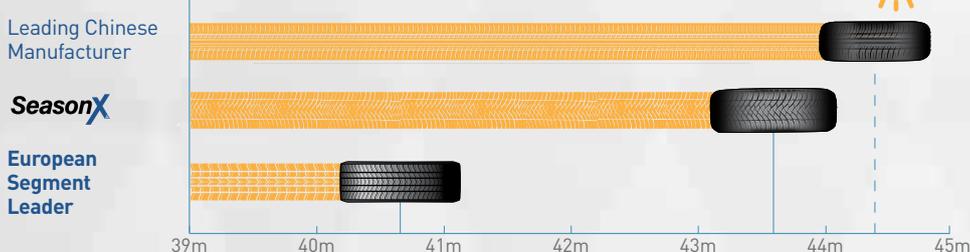


Features and Benefits



Solid central part geometry

For good directional driving and handling, resulting in good wet and dry handling properties.



Directional V-shaped grooves

For efficient water slush dispersion, resulting in confident safe driving in wet and snow.



Asymmetric groove shape

For stabilized tread block, resulting in improved braking performance.



Strategically placed sipes

For improved traction on snow and ice, resulting in superior driving safety.



Advanced renewable silica - silane polymers featuring renewable raw materials

For enhanced sustainability, resulting in excellent all round winter and summer performance.



Balanced polyester fiber matrix

For better uniformity in tire, resulting in comfort in different road conditions.

Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	255	35	19	96	Y	XL	C	B	B	73
CAR	235	35	19	91	W	XL	D	B	B	72
CAR	235	40	19	96	Y	XL	D	B	B	72
CAR	245	40	18	97	Y	XL	C	B	B	72
CAR	235	40	18	95	Y	XL	C	B	B	72
CAR	225	40	18	92	Y	XL	D	B	B	72
CAR	245	45	19	102	Y	XL	C	B	B	72
CAR	225	45	19	96	Y	XL	C	B	B	72
CAR	245	45	18	100	W	XL	C	B	B	71
CAR	235	45	18	98	Y	XL	C	B	B	72

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	225	45	18	95	Y	XL	C	B	B	72
CAR	215	45	18	93	V	XL	C	B	B	72
CAR	235	45	17	97	Y	XL	D	B	B	72
CAR	225	45	17	94	W	XL	C	B	B	72
CAR	215	45	17	91	W	XL	D	B	B	72
CAR	205	45	17	88	W	XL	D	B	B	72
CAR	215	45	16	90	V	XL	C	B	B	72
CAR	205	45	16	87	W	XL	C	B	B	72
CAR	225	50	17	98	W	XL	D	B	B	72
CAR	215	50	17	95	W	XL	C	B	B	72
CAR	205	50	17	93	V	XL	C	B	B	72
CAR	205	50	16	91	W	XL	D	B	B	72
CAR	195	50	16	88	V	XL	C	C	B	72
CAR	195	50	15	82	V	-	D	C	B	71
CAR	195	55	20	95	H	XL	C	C	B	72
CAR	225	55	17	101	W	XL	C	B	B	72
CAR	215	55	17	98	W	XL	C	B	B	72
CAR	205	55	17	95	V	XL	C	B	B	72
CAR	225	55	16	99	V	XL	C	B	B	72
CAR	215	55	16	97	V	XL	C	B	B	72
CAR	205	55	16	94	V	XL	C	B	B	72
CAR	195	55	16	91	V	XL	C	C	B	72
CAR	185	55	16	87	V	XL	C	C	B	71
CAR	195	55	15	89	V	XL	C	C	B	72
CAR	185	55	15	86	H	XL	C	C	B	71
CAR	235	60	16	100	V	-	C	B	B	71
CAR	215	60	16	99	V	XL	C	B	B	72
CAR	205	60	16	96	V	XL	C	B	B	72
CAR	195	60	16	93	V	XL	C	C	B	72
CAR	195	60	15	92	V	XL	C	C	B	72
CAR	185	60	15	88	H	XL	C	C	B	71
CAR	165	60	15	77	H	-	D	C	B	70
CAR	155	60	15	74	T	-	D	C	B	70
CAR	185	60	14	82	H	-	D	C	B	70
CAR	165	60	14	79	T	XL	D	C	B	70
CAR	205	65	15	99	V	XL	C	B	B	72

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	195	65	15	95	V	XL	C	C	B	72
CAR	185	65	15	88	H	-	C	C	B	70
CAR	175	65	15	84	H	-	C	C	B	70
CAR	165	65	15	85	H	XL	D	C	B	71
CAR	185	65	14	86	H	-	D	C	B	70
CAR	175	65	14	86	H	XL	C	C	B	71
CAR	165	65	14	79	T	-	C	C	B	70
CAR	155	65	14	75	T	-	D	C	B	70
CAR	195	70	14	91	T	-	C	C	B	71
CAR	185	70	14	88	H	-	D	C	B	70
CAR	175	70	14	88	T	XL	C	C	B	71
CAR	165	70	14	85	T	XL	C	C	B	71

Product Specifications

SUV



Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	255	45	19	104	Y	XL	C	B	B	73
SUV	235	50	18	101	Y	XL	C	B	B	72
SUV	225	50	18	99	W	XL	C	B	B	72
SUV	215	50	18	92	W	XL	C	B	B	72
SUV	235	55	19	105	W	XL	B	B	B	72
SUV	225	55	19	99	W	-	C	B	B	71
SUV	235	55	18	104	W	XL	C	B	B	72
SUV	225	55	18	102	V	XL	C	B	B	72
SUV	215	55	18	99	V	XL	C	B	B	72
SUV	235	55	17	103	Y	XL	D	B	B	72
SUV	235	60	18	107	W	XL	C	B	B	72
SUV	225	60	17	103	V	XL	C	B	B	72
SUV	215	60	17	100	V	XL	C	B	B	72
SUV	235	65	17	108	W	XL	C	B	B	72
SUV	225	65	17	106	V	XL	C	B	B	72
SUV	215	65	17	103	V	XL	B	B	B	72
SUV	215	65	16	102	H	XL	C	B	B	72

Season*X* **VAN** TA702

PAGE 60





SeasonX VAN TA702

- Latest generation of All-season light truck pattern for modern commercial vehicles
- Excellent dry and wet handling performance
- Superb grip and snow traction
- Low noise pattern design, low carbon and fuel saving



Product Specifications

Segment	Width	Ratio	Rim	LI	SI				Noise
VAN	195	60	16	99/97	H	C	C	B	72
VAN	215	60	16	103/101	H	C	B	B	72
VAN	215	60	17	109/107	T	C	B	B	72
VAN	195	65	16	104/102	T	C	C	B	72
VAN	205	65	15	102/100	T	C	B	B	72
VAN	205	65	16	107/105	T	C	B	B	72
VAN	215	65	15	104/102	T	D	B	B	72
VAN	215	65	16	109/107	T	C	B	B	72
VAN	225	65	16	112/110	T	C	B	B	72
VAN	235	65	16	115/113	S	C	B	B	72
VAN	195	70	15	104/102	S	D	C	B	72
VAN	205	70	15	106/104	R	C	B	B	72
VAN	215	70	15	109/107	S	C	B	B	72
VAN	225	70	15	112/110	S	C	B	B	72
VAN	185	75	16	104/102	T	D	C	B	72
VAN	195	75	16	110/108	T	C	C	B	72
VAN	205	75	16	113/111	T	D	B	B	72
VAN	215	75	16	116/114	R	C	B	B	72
VAN	225	75	16	121/120	S	C	B	B	72

Features and Benefits



3D curve pattern design with high density siping and circumferential serrated grooves

Delivers improved wet traction and cornering stability in both wet and snow conditions, resulting in improved handling and braking capabilities in all conditions.




High-density continuous center blocks

Delivers tread stability and enhanced tire footprint, resulting in high level of wear resistance for improved mileage.



Optimized groove design featuring circumferential zigzag grooves

Delivers rapid water drainage and enhanced grip on snow, resulting in exceptional braking in wet and snow, and enhanced snow traction.

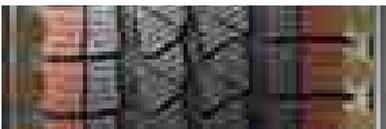


Stair step shoulder design

As the tread wears, the actual ground contact width increases, ensuring full life-cycle grip performance.



Main grooves with bevel edges design

Delivers dynamic contact area of the tires when turning, resulting in improved handling performance.

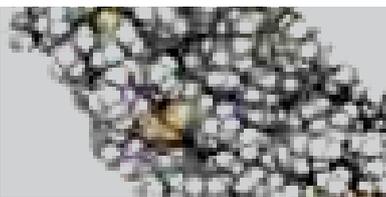

Multi-functionalized rubber mixing with high reinforcing filler formula with special low-temperature enhanced compounding

Delivers a closer combination between rubber and filler molecules driving superior wet and snow traction, resulting in enhance braking performance in all conditions and seasons and comfortable driving experience.

EffeX Winter TW421

PAGE 64



WinterX TW401

PAGE 66



SNOWLINK PL02

PAGE 70




SNOWLION TR777

PAGE 72





- Winter Ultra High Performance tire
- Wet traction
- Best grip on snow and ice
- Safety without compromise



Features and Benefits




Directional pattern with effective V-channels

Improved wet traction and cornering stability in both wet and snow conditions, resulting in improved handling and braking capabilities in all conditions



Adaptive sipe technology

Excellent grip on snow and ice



Laterally rigid tread

Precise steering and stable cornering properties



Latest generation functionalized polymers

Enhancing tire properties over the entire temperature range

Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	275	35	20	102	W	XL	C	B	B	71
CAR	255	35	20	97	W	XL	D	B	B	73
CAR	245	35	20	95	W	XL	D	B	B	72
CAR	275	35	19	100	W	XL	C	B	B	73
CAR	255	35	19	96	V	XL	D	B	B	73
CAR	255	40	20	101	W	XL	C	B	B	73
CAR	245	40	20	99	W	XL	D	B	B	72
CAR	255	40	19	100	V	XL	C	B	B	73
CAR	245	40	19	98	V	XL	D	B	B	72
CAR	235	40	19	96	W	XL	C	B	B	72
CAR	245	40	18	97	V	XL	C	B	B	72
CAR	235	40	18	95	V	XL	C	B	B	72
CAR	225	40	18	92	V	XL	D	B	B	72
CAR	275	45	21	110	V	XL	C	B	B	73
CAR	245	45	20	103	V	XL	C	B	B	72
Car	255	45	19	104	V	XL	C	B	B	73
CAR	245	45	19	102	V	XL	C	B	B	72
CAR	235	45	19	99	V	XL	C	B	B	72
CAR	225	45	19	96	V	XL	C	B	B	72
CAR	245	45	18	100	V	XL	C	B	B	72
CAR	235	45	18	98	V	XL	C	B	B	72
CAR	225	45	18	95	V	XL	C	B	B	72
CAR	225	45	17	94	V	XL	D	B	B	72
CAR	275	50	20	113	V	XL	B	B	B	73
CAR	265	50	20	111	V	XL	C	B	B	73
CAR	255	50	20	109	V	XL	C	B	B	73
CAR	235	50	20	104	V	XL	C	B	B	72
CAR	255	50	19	107	V	XL	C	B	B	73
CAR	245	50	19	105	V	XL	C	B	B	72
CAR	245	50	18	100	V	XL	C	B	B	71
CAR	235	50	18	101	V	XL	C	B	B	72
CAR	225	50	18	99	V	XL	C	B	B	72
CAR	215	50	18	96	V	XL	C	B	B	72
CAR	255	55	20	110	V	XL	B	B	B	73
CAR	235	55	20	105	V	XL	C	B	B	72
CAR	255	55	19	111	V	XL	C	B	B	73
CAR	245	55	19	107	V	XL	C	B	B	72
CAR	215	55	17	98	V	XL	C	B	B	72
CAR	205	55	16	94	W	XL	C	B	B	72
CAR	265	60	18	114	H	XL	B	B	B	73
CAR	235	60	18	107	V	XL	C	B	B	72
CAR	225	60	18	104	V	XL	C	B	B	72

WinterXTM TW401

- Directional pattern for central European winter
- Excellent handling performance on icy and snowy roads
- Class beating wet performance
- Low noise and comfort



WINTER



DIRECTIONAL



COMFORT



WET HANDLING



RIM

13" - 20"



RATIO

45 - 80



Features and Benefits



Two ultra-wide longitudinal pattern grooves

Effectively drain water to avoid water film phenomenon, resulting in excellent wet braking and handling performance.




Extra wide tread design

Ultra-wide foot print, resulting in excellent handling in all conditions.




Optimized pattern pitch arrangement

Pattern noise reduction, resulting in good acoustic comfort.

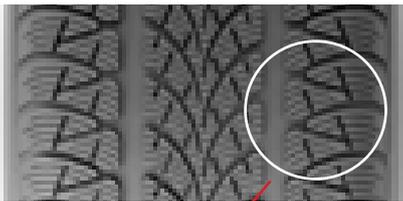

Compact 3D steel sheet and multiple pattern groove cross design

Improved grip on ice and snow, resulting in excellent braking and acceleration in snowy and icy conditions.



New generation high-performance tread formula

New generation compound with functionalized polystyrene butadiene rubber and high-dispersion white carbon black. Excellent wet, snow and dry braking performance with reduced rolling resistance, resulting in enhanced safety whilst making vehicles more energy efficient.

Product Specifications



Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	245	45	19	102	V	XL	C	C	B	71
CAR	225	45	17	94	V	XL	D	C	B	72
CAR	215	45	17	91	V	XL	D	C	B	72
CAR	205	45	17	88	V	XL	D	C	B	72
CAR	195	45	16	84	H	XL	D	C	B	71
CAR	225	50	17	98	V	XL	C	C	B	72
CAR	215	50	17	95	V	XL	D	C	B	72
CAR	205	50	17	93	V	XL	D	C	B	72
CAR	195	50	16	88	H	XL	E	C	B	72
CAR	195	50	15	82	H	-	D	C	B	71
CAR	195	55	20	95	H	XL	D	C	B	72
CAR	205	55	19	97	V	XL	D	C	B	72
CAR	225	55	17	101	V	XL	D	C	B	72
CAR	215	55	17	98	V	XL	D	C	B	72
CAR	205	55	17	95	V	XL	D	C	B	72
CAR	225	55	16	99	V	XL	C	C	B	72
CAR	215	55	16	97	V	XL	D	C	B	72
CAR	205	55	16	94	V	XL	D	C	B	72
CAR	195	55	16	91	H	XL	E	C	B	72
CAR	195	55	15	85	H	-	E	C	B	71
CAR	185	55	15	86	H	XL	E	C	B	71
CAR	225	60	16	102	V	XL	C	C	B	72
CAR	215	60	16	99	H	XL	D	C	B	72
CAR	205	60	16	96	H	XL	D	C	B	72
CAR	195	60	16	89	H	-	D	C	B	71
CAR	195	60	15	88	T	-	D	C	B	71
CAR	185	60	15	88	H	XL	E	C	B	71
CAR	165	60	15	81	T	XL	D	C	B	71
CAR	195	65	15	95	H	XL	E	C	B	71
CAR	195	65	15	91	H	-	E	C	B	71
CAR	195	65	15	95	T	XL	E	C	B	72

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	185	65	15	92	H	XL	E	C	B	71
CAR	185	65	15	88	H	-	E	C	B	70
CAR	185	65	15	92	T	XL	E	C	B	71
CAR	175	65	15	84	T	-	E	C	B	70
CAR	165	65	15	81	T	-	E	C	B	70
CAR	165	65	14	79	T	-	E	C	B	70
CAR	155	65	14	75	T	-	E	D	B	70
CAR	185	70	14	88	T	-	D	C	B	70
CAR	155	80	13	79	T	-	E	D	B	70

SNOWLINK PL02

- Asymmetrical winter tire offering excellent comfort and outstanding high speed performance
- Excellent grip
- Best traction and handling
- Braking performance on icy and snowy roads



WINTER

ASYMMETRICAL

SNOW HANDLING

COMFORT



RIM

17" - 20"



RATIO

35 - 65

Features and Benefits



Left-right asymmetrical design

Improved handling with high performance on ice and snow.



Three zigzag groove design

Improved mobility and drainage, performance on bad road conditions.



Constructed with fine and closed 3D blade grooves

Improved grip performance in mud and ice-snow conditions.



Structure Design

Wider tread with larger footprint to increase the tire contact area, resulting in enhanced traction performance and mileage.

Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	275	35	20	102	V	XL	D	C	B	73
CAR	255	35	20	97	W	XL	D	C	B	73
CAR	245	35	20	95	W	XL	D	C	B	72
CAR	275	35	19	100	W	XL	C	C	B	73
CAR	255	35	19	96	V	XL	D	D	B	73
CAR	245	35	19	93	W	XL	D	C	B	72
CAR	235	35	19	91	W	XL	D	D	B	72
CAR	225	35	19	88	W	XL	D	D	B	72
CAR	265	40	20	104	V	XL	D	D	B	73
CAR	245	40	20	99	V	XL	D	C	B	72
CAR	255	40	19	100	V	XL	D	D	B	73
CAR	245	40	19	98	V	XL	D	C	B	72
CAR	235	40	19	96	W	XL	E	D	B	72
CAR	225	40	19	93	V	XL	E	D	B	72
CAR	255	40	18	99	V	XL	D	C	B	73
CAR	245	40	18	97	V	XL	D	D	B	72
CAR	235	40	18	95	V	XL	D	D	B	72
CAR	225	40	18	92	V	XL	D	D	B	72
CAR	245	45	19	102	V	XL	C	D	B	72
CAR	235	45	19	99	V	XL	D	D	B	72
CAR	225	45	19	96	V	XL	D	D	B	72
CAR	255	45	18	103	V	XL	C	C	B	73
CAR	245	45	18	100	V	XL	D	D	B	72
CAR	235	45	18	98	V	XL	D	D	B	72
Car	225	45	18	95	V	XL	C	D	B	72
CAR	245	45	17	99	V	XL	D	D	B	72
CAR	235	45	17	97	V	XL	D	D	B	72
CAR	245	65	17	111	H	XL	C	C	B	72

SNOWLION TR777

- Silica compound for anti sliding performance
- Self locking sipes configuration for a great performance and best handling on wet and snowy roads
- Directional V -type tread design to maximize traction on snow and slush
- Improved straight handling at high speed thanks to continuous center line rib design



WINTER



DIRECTIONAL



WET HANDLING



RIM

13" - 15"



RATIO

60 - 70

Features and Benefits



Zigzag grooves design with increased number of binding edges

Excellent snow traction and handling.



Tread design featuring self-locking sipe configuration for higher stiffness

Excellent braking performance and handling.



Directional pattern with

Improved high speed straight handling and aquaplaning performance.



Optimised high dispersion silica compound

Improved anti-skidding performance in cold weather.

Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	195	60	14	86	T	-	D	D	B	71
CAR	185	60	14	82	T	-	D	D	B	70
CAR	205	65	15	99	T	XL	D	D	B	72
CAR	185	65	14	86	T	-	C	D	B	70
CAR	175	65	14	86	T	XL	D	D	B	71
CAR	205	70	15	96	T	-	D	D	B	71
CAR	175	70	14	88	T	XL	D	D	B	71
CAR	165	70	14	81	T	-	D	E	B	70
CAR	175	70	13	82	T	-	D	D	B	70
CAR	165	70	13	79	T	-	D	E	B	70
CAR	155	70	13	75	T	-	E	E	B	70

EffeX Winter TW421

PAGE 76



WinterX TW401

PAGE 78



SNOWLINK PL02

PAGE 80



SNOWLION TR777


PAGE 82





EffeX Winter TW421

- Directional winter UHP pattern for latest SUV generation
- Cornering stability
- Handling and braking capabilities
- Safety without compromise



Features and Benefits



Directional pattern with effective V-channels

Improved wet traction and cornering stability in both wet and snow conditions, resulting in improved handling and braking capabilities in all conditions



Adaptive sipe technology

Excellent grip on snow and ice



Laterally rigid tread

Precise steering and stable cornering properties



Latest generation functionalized polymers

Enhancing tire properties over the entire temperature range

Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	275	40	20	106	W	XL	C	B	B	73
SUV	275	45	20	110	W	XL	C	B	B	73
SUV	255	45	20	105	W	XL	C	B	B	73
SUV	235	50	19	103	V	XL	C	B	B	72
SUV	235	55	19	105	V	XL	C	B	B	72
SUV	225	55	19	103	V	XL	C	B	B	72
SUV	235	55	18	104	V	XL	C	B	B	72
SUV	225	55	18	102	V	XL	C	B	B	72

WinterXTM TW401

- The directional winter pattern for the SUV segment, ideal for mild to moderate winter climates in Europe
- Cutting edge tire technology offering class beating wet performances, handling and comfort



WINTER



DIRECTIONAL



WET HANDLING



COMFORT



RIM

16" - 18"



RATIO

55 - 65



Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	215	55	18	99	V	XL	D	C	B	72
SUV	225	60	17	103	V	XL	C	C	B	72
SUV	215	60	17	100	V	XL	C	C	B	72
SUV	225	65	17	106	H	XL	C	C	B	72
SUV	215	65	17	99	V	-	C	C	B	71
SUV	215	65	16	102	H	XL	C	C	B	72

SNOWLINK PL02

- Asymmetrical winter tire offering excellent comfort and outstanding high speed performance
- Excellent grip, best traction and shorten braking distance on icy and snowy roads
- Specially developed for SUVs



Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	295	35	21	107	V	XL	C	C	B	75
SUV	315	35	20	110	V	XL	D	C	A	72
SUV	275	40	21	107	V	XL	C	C	B	73
SUV	295	40	20	110	V	XL	C	C	B	75
SUV	275	40	20	106	V	XL	D	D	B	73
SUV	255	40	20	101	W	XL	C	C	B	73
SUV	275	40	19	105	V	XL	D	D	B	73
SUV	275	45	21	110	V	XL	C	C	B	73
SUV	265	45	21	108	V	XL	C	C	B	73
SUV	275	45	20	110	W	XL	D	D	B	73
SUV	265	45	20	108	V	XL	C	C	B	73
SUV	255	45	20	105	V	XL	C	D	B	73
SUV	245	45	20	103	V	XL	D	D	B	72
SUV	285	45	19	111	V	XL	C	C	B	75

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	255	45	19	104	V	XL	D	D	B	73
SUV	285	50	20	116	H	XL	D	C	B	75
SUV	275	50	20	113	V	XL	B	C	B	73
SUV	265	50	20	111	V	XL	C	C	B	73
SUV	255	50	20	109	V	XL	C	C	B	73
SUV	265	50	19	110	V	XL	C	D	B	73
SUV	255	50	19	107	V	XL	C	C	B	73
SUV	245	50	19	105	V	XL	C	C	B	72
SUV	235	50	19	103	H	XL	D	D	B	72
SUV	245	50	18	104	V	XL	D	D	B	72
SUV	235	50	18	101	V	XL	C	D	B	72
SUV	225	50	18	99	V	XL	D	D	B	72
SUV	215	50	18	96	V	XL	C	E	B	72
SUV	255	55	20	110	V	XL	C	C	B	73
SUV	235	55	20	105	V	XL	C	D	B	72
SUV	255	55	19	111	V	XL	C	D	B	73
SUV	245	55	19	107	V	XL	C	C	B	72
SUV	235	55	19	105	V	XL	C	D	B	72
SUV	225	55	19	99	H	-	D	D	B	71
SUV	255	55	18	109	V	XL	C	C	B	73
SUV	235	55	18	104	V	XL	C	D	B	72
SUV	225	55	18	102	V	XL	D	D	B	72
SUV	235	60	19	107	H	XL	C	D	B	72
SUV	285	60	18	120	H	XL	D	C	B	73
SUV	265	60	18	114	H	XL	D	D	B	73
SUV	255	60	18	112	V	XL	C	C	B	73
SUV	235	60	18	107	V	XL	C	D	B	72
SUV	225	60	18	104	V	XL	C	D	B	72
SUV	235	60	17	106	H	XL	C	D	B	72
SUV	255	65	17	114	H	XL	C	C	B	73
SUV	235	65	17	108	V	XL	C	D	B	72
SUV	265	70	18	116	T	-	C	C	B	72
SUV	265	70	16	112	T	-	C	C	B	72
SUV	255	70	16	111	H	-	C	C	B	72
SUV	245	70	16	111	H	XL	C	C	B	72

SNOWLION TR777

- Silica compound for anti sliding performance
- Self locking sipes configuration for a great performance and best handling on wet and snowy roads
- Directional V-type tread design to maximize traction on snow and slush
- Improved straight handling at high speed thanks to continuous center line rib design
- Specially developed for SUVs



Product Specifications

Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	245	55	19	103	H	-	D	D	B	72
SUV	235	55	17	103	V	XL	D	D	B	72
SUV	225	60	17	99	H	-	D	D	B	71
SUV	255	65	16	109	H	-	D	D	B	72
SUV	235	70	16	106	H	-	D	D	B	71
SUV	225	70	16	107	H	XL	D	D	B	72
SUV	215	70	16	104	T	XL	D	D	B	72
SUV	215	70	15	98	T	-	C	D	B	71
SUV	235	75	15	105	T	-	D	D	B	71
SUV	215	75	15	100	S	-	D	D	B	72

SNOWLINK LL01

PAGE 86



TR737

PAGE 88






SNOWLINK LL01

- High traction on ice and snow thanks to large shoulder blocks and high sipes density
- Improved grip and driving capabilities due to zig-zag shoulders design
- Water and slush evacuation thanks to wide circumferential and radial grooves



Performance

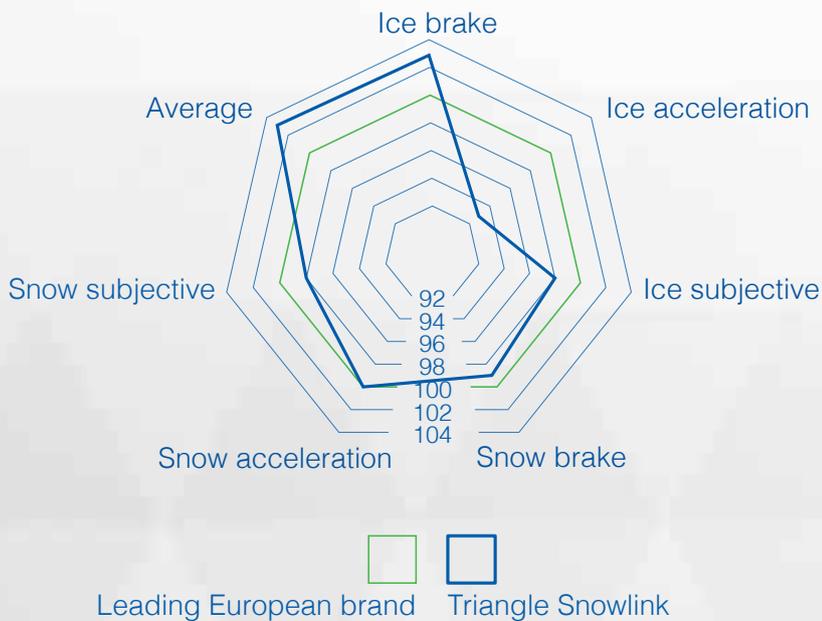

Features and Benefits



Deep symmetrical tire with V-type main grooves and zigzag shoulder grooves design

Excellent snow traction and drivability.



High sipes density

Enhanced traction in winter conditions.



Wider tread and large footprint for an increased tire contact area

Enhanced ice traction performance and improved mileage.



Optimised high dispersion silica compound

Improved anti-skidding performance in cold weather.

Product Specifications

Segment	Width	Ratio	Rim	LI	SI				Noise
VAN	215	60	17	109/107	T	E	D	B	73
VAN	215	60	16	103/101	H	E	D	B	73
VAN	195	60	16	99/97	H	E	D	B	73
VAN	235	65	16	115/113	R	E	D	B	71
VAN	225	65	16	112/110	T	E	D	B	73
VAN	215	65	16	109/107	Q	E	D	B	72
VAN	205	65	16	107/105	T	E	D	B	73
VAN	195	65	16	104/102	T	E	D	B	73
VAN	225	70	15	112/110	R	E	D	B	73
VAN	215	70	15	109/107	S	D	D	B	73
VAN	195	70	15	104/102	Q	E	D	B	73
VAN	225	75	16	121/120	R	E	D	B	73
VAN	215	75	16	113/111	Q	E	D	B	73
VAN	205	75	16	113/111	R	D	D	B	73
VAN	195	75	16	107/105	Q	D	D	B	73
VAN	185		15	103/102	Q	E	D	B	73
VAN	195		14	106/104	Q	E	D	B	73

TR737


- Increase of tread rigidity from center to shoulders in order to give good pressure distribution and handling in cornering
- Tread shoulders large block design to ensure longer mileage
- Three circumferential main grooves to improve stability, traction and reduced braking distance on ice and snow



Product Specifications

Segment	Width	Ratio	Rim	LI	SI				Noise
VAN	215	70	16	106/102	Q	D	C	B	73
VAN	185	75	16	104/102	Q	D	C	B	73
VAN	175	75	14	94/91	S	D	C	B	73
VAN	185		14	102/100	Q	E	C	B	73

Features and Benefits



Three circumferential main grooves

Braking performance, stability and traction on ice and snow.



Robust shoulder design

Uniform treadwear and extended tire life.



Even pressure distribution

Improved driving and handling performance.



Optimised high dispersion silica compound

Improved grip in cold weather conditions.

SNOWLINK PL01

PAGE 92






SNOWLINK PL01


- Snowlink PL01 is designed for driving in extreme winter conditions
- Directional pattern with straight center line rib aimed to improve handling at high speed
- Longer mileage and uniform wear thanks to optimized tire structure design



Performance

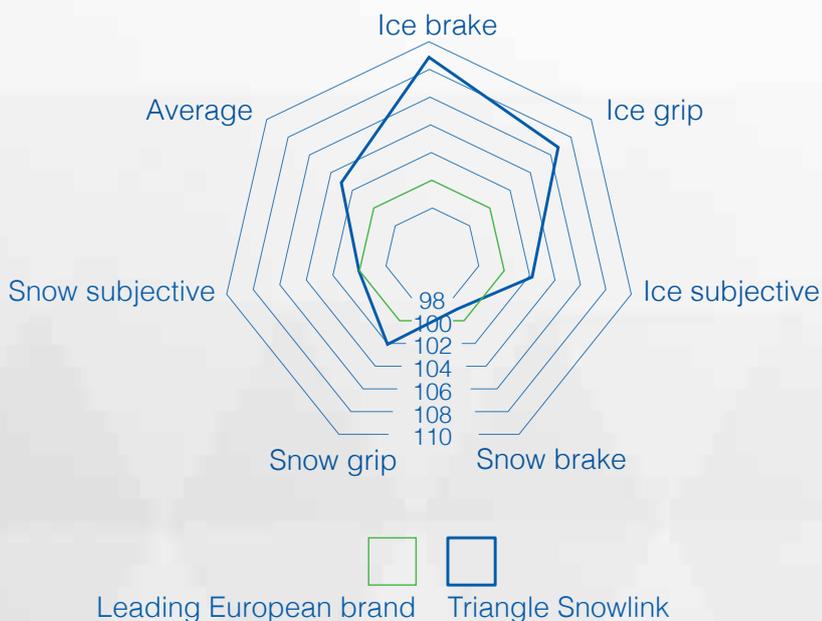


Features and Benefits



V-type and variable depth directional grooves

High resistance to aquaplaning, resulting in improved handling in deep water and slush conditions.



Staggered block arrangement and high radial sipe density

Enhanced traction, resulting in greater braking performance on snow and ice.



Directional pattern with straight center line rib design

Increased center line rigidity, resulting in good straight-line handling at high speed.



Optimised high dispersion silica compound

Improved anti-skidding performance on ice and snow.



Optimized multi-pitch shoulder block sequence design

Smooth transition between blocks, resulting in improved acoustic comfort.

SNOWLINK PL01

Product Specifications


CAR



Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	235	40	18	95	R	XL	D	D	B	72
CAR	225	40	18	92	R	XL	D	E	B	72
CAR	245	45	18	100	R	XL	D	D	B	72
CAR	235	45	18	98	R	XL	D	D	B	72
CAR	235	45	17	97	R	XL	D	D	B	72
CAR	225	45	17	94	R	XL	D	D	B	72
CAR	215	45	17	91	R	XL	D	D	B	72
CAR	225	50	17	98	R	XL	D	D	B	72
CAR	215	50	17	95	R	XL	D	D	B	72
CAR	205	50	17	93	R	XL	D	D	B	72
CAR	205	50	16	91	T	XL	D	D	B	72
CAR	225	55	17	101	R	XL	D	D	B	72
CAR	215	55	17	98	R	XL	C	D	B	72
CAR	225	55	16	99	R	XL	D	D	B	72
CAR	215	55	16	97	R	XL	D	D	B	72
CAR	205	55	16	94	R	XL	D	D	B	72
CAR	195	55	16	91	R	XL	D	D	B	72
CAR	195	55	15	89	R	XL	D	D	B	72
CAR	185	55	15	86	T	XL	E	D	B	71
CAR	215	60	16	99	R	XL	D	D	B	72
CAR	205	60	16	96	R	XL	D	D	B	72
CAR	195	60	16	93	R	XL	C	D	B	72
CAR	195	60	15	92	R	XL	D	D	B	72
CAR	185	60	15	88	R	XL	D	D	B	71
CAR	165	60	14	79	R	XL	D	D	B	71
CAR	205	65	15	99	R	XL	D	D	B	72
CAR	195	65	15	95	R	XL	D	D	B	72
CAR	185	65	15	92	R	XL	D	D	B	71
CAR	185	70	14	92	R	XL	C	D	B	71

Product Specifications

SUV



Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	275	45	21	110	R	XL	D	D	B	72
SUV	245	50	20	102	T	-	D	D	B	71
SUV	255	50	19	107	R	XL	D	D	B	73
SUV	235	50	18	101	R	XL	D	D	B	72
SUV	255	55	20	110	R	XL	D	D	B	72
SUV	255	55	19	111	R	XL	D	D	B	73
SUV	235	55	19	105	R	XL	C	D	B	72
SUV	225	55	18	102	R	XL	D	D	B	72
SUV	215	55	18	99	R	XL	D	D	B	72
SUV	235	60	18	107	R	XL	D	D	B	72
SUV	225	60	18	104	R	XL	D	D	B	72
SUV	225	60	17	103	R	XL	D	D	B	72
SUV	235	60	16	104	R	XL	D	D	B	72
SUV	205	60	15	95	R	XL	D	D	B	72
SUV	235	65	18	110	T	XL	C	D	B	72
SUV	235	65	17	108	R	XL	D	D	B	72
SUV	225	65	17	106	R	XL	D	D	B	72
SUV	215	65	17	99	T	-	D	D	B	71
SUV	215	65	16	102	R	XL	D	D	B	72
SUV	265	70	17	115	T	-	C	D	B	72
SUV	245	70	17	110	T	-	C	D	B	71
SUV	235	70	16	109	R	XL	D	D	B	72
SUV	225	70	16	107	R	XL	D	D	B	72
SUV	245	75	16	111	T	-	D	D	B	71

IcelynX TI501

PAGE 98





Icelyn^X TI501

- Nordic winter tire with high density of studs
- Excellent handling performance on icy and snowy roads
- Great and snow and ice acceleration

DESIGNED IN
EUROPE 



WINTER



STUDDABLE



ICE AND
SNOW



NEW SILICA
COMPOUND



DIRECTIONAL

M+S 



Features and Benefits



Double tread radius tread shape

Increased shoulder stability and improved tread center stiffness, resulting in enhanced cornering, stability and grip.



Laterally interconnected tread geometry

Excellent lateral stiffness, resulting in good steering accuracy.



Tread-wide studs distribution

Maximum grip thanks to the synergic independent work of each stud, resulting in superior braking and acceleration performance in icy and snowy conditions.



Lighter stud design

Superior braking and acceleration performance in icy and snowy conditions, resulting in minimized road surface damage.



Pattern with wide V-grooves design

Superior braking and handling performance in icy and snowy conditions, resulting in excellent water and slush drainage.

Product Specifications

CAR



Segment	Width	Ratio	Rim	LI	SI	XL				Noise
CAR	235	35	19	91	T	XL	D	C	B	72
CAR	225	40	18	92	T	XL	D	C	B	72
CAR	245	45	18	100	T	XL	C	C	B	72
CAR	235	45	18	98	T	XL	C	C	B	72
CAR	225	45	18	95	T	XL	C	D	B	72
CAR	225	45	17	94	T	XL	C	C	B	72
CAR	225	50	17	98	T	XL	C	C	B	72
CAR	215	50	17	95	T	XL	C	D	B	72
CAR	205	50	17	93	T	XL	C	D	B	72
CAR	225	55	17	101	T	XL	C	C	B	72
CAR	215	55	17	98	T	XL	C	D	B	72
CAR	225	55	16	99	T	XL	C	C	B	72
CAR	215	55	16	97	T	XL	D	D	B	72
CAR	205	55	16	94	T	XL	C	D	B	72
CAR	215	60	16	99	T	XL	C	D	B	72
CAR	205	60	16	96	T	XL	C	D	B	72
CAR	195	60	15	92	T	XL	D	D	B	72
CAR	185	60	15	88	T	XL	D	D	B	71
CAR	185	60	14	86	T	XL	D	D	B	71
CAR	205	65	16	95	T	-	C	D	B	71
CAR	205	65	15	99	T	XL	D	D	B	72
CAR	195	65	15	95	T	XL	C	D	B	72
CAR	185	65	15	92	T	XL	D	D	B	71
CAR	175	65	15	88	T	XL	D	D	B	71
CAR	185	65	14	90	T	XL	D	D	B	71
CAR	175	65	14	86	T	XL	D	D	B	71
CAR	155	65	14	75	T	-	E	D	B	70
CAR	205	70	15	100	T	XL	C	D	B	72
CAR	175	70	14	88	T	XL	D	D	B	71


Product Specifications

SUV



Segment	Width	Ratio	Rim	LI	SI	XL				Noise
SUV	275	40	20	106	T	XL	C	C	B	72
SUV	235	55	19	105	T	XL	C	C	B	72
SUV	255	55	18	109	T	XL	C	C	B	73
SUV	235	55	18	104	T	XL	C	C	B	72
SUV	225	55	18	102	T	XL	C	C	B	72
SUV	265	60	18	114	T	XL	C	C	B	73
SUV	235	60	18	107	T	XL	C	C	B	72
SUV	225	60	18	104	T	XL	C	C	B	72
SUV	235	60	17	106	T	XL	C	C	B	72
SUV	225	60	17	103	T	XL	C	C	B	72
SUV	215	60	17	100	T	XL	D	D	B	72
SUV	265	65	18	114	T	-	C	C	B	72
SUV	265	65	17	116	T	XL	C	C	B	73
SUV	255	65	17	114	T	XL	C	C	B	73
SUV	245	65	17	111	T	XL	C	C	B	72
SUV	235	65	17	108	T	XL	C	C	B	72
SUV	225	65	17	106	T	XL	C	C	B	72
SUV	215	65	16	102	T	XL	C	D	B	72
SUV	255	70	18	113	T	-	C	C	B	72
SUV	215	70	16	104	T	XL	C	D	B	72

Tire marking

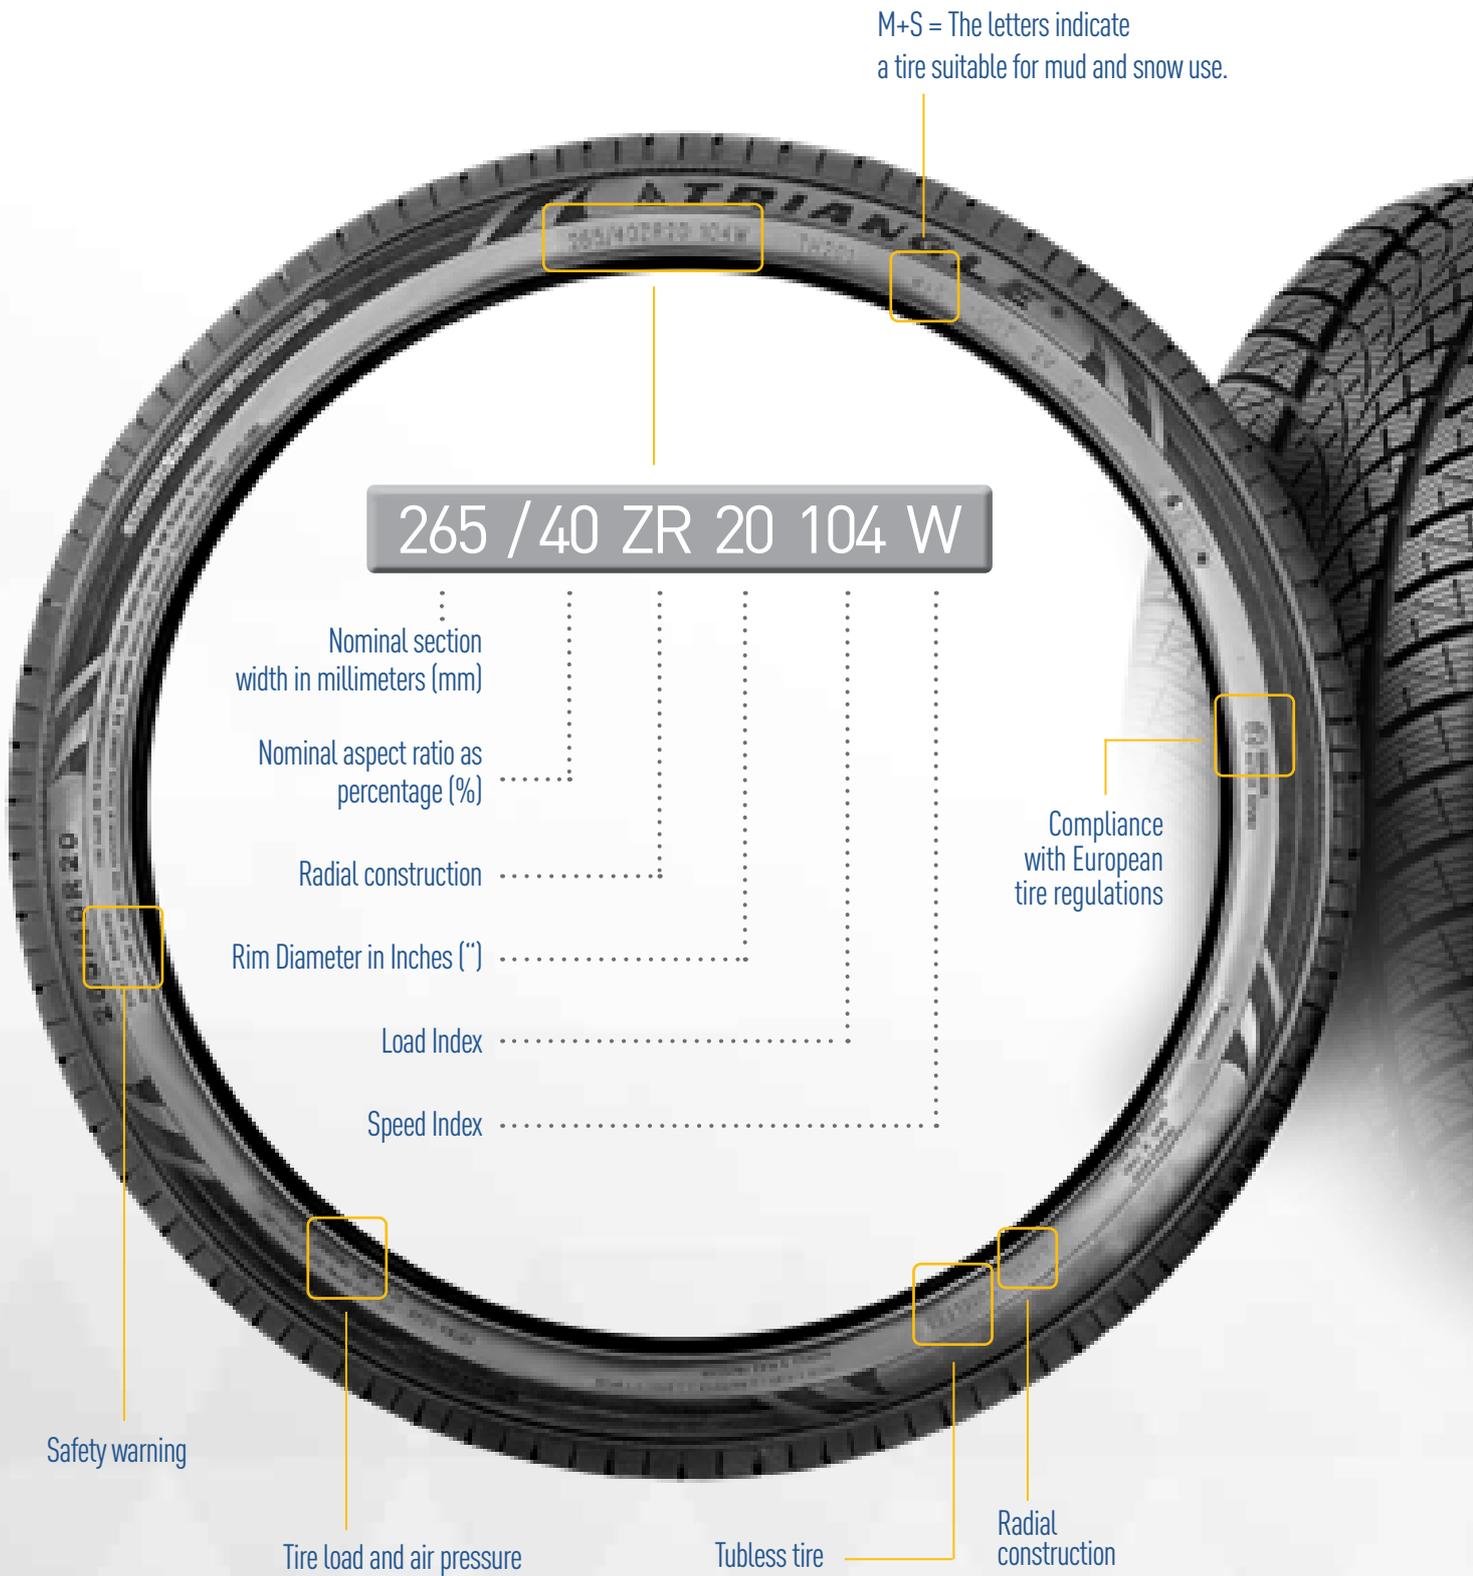

Load & Speed Index

Load Index

LI	KG	LI	KG	LI	KG	LI	KG
50	190	76	400	102	850	128	1800
51	195	77	412	103	875	129	1850
52	200	78	425	104	900	130	1900
53	206	79	437	105	925	131	1950
54	212	80	450	106	950	132	2000
55	218	81	462	107	975	133	2060
56	224	82	475	108	1000	134	2120
57	230	83	487	109	1030	135	2180
58	236	84	500	110	1060	136	2240
59	243	85	515	111	1090	137	2300
60	250	86	530	112	1120	138	2360
61	257	87	545	113	1150	139	2430
62	265	88	560	114	1180	140	2500
63	272	89	580	115	1215	141	2575
64	280	90	600	116	1250	142	2650
65	290	91	615	117	1285	143	2725
66	300	92	630	118	1320	144	2800
67	307	93	650	119	1360	145	2900
68	315	94	670	120	1400	146	3000
69	325	95	690	121	1450	147	3075
70	335	96	710	122	1500	148	3150
71	345	97	730	123	1550	149	3250
72	355	98	750	124	1600	150	3350
73	365	99	775	125	1650	151	3450
74	375	100	800	126	1700	152	3550
75	387	101	825	127	1750	153	3650

Speed Index

Speed Ratings	L	M	N	P	Q	R	S
Max Speed Km/hr	120	130	140	150	160	170	180


Speed Ratings	T	U	H	V	W	Y
Max Speed Km/hr	190	200	210	240	270	300



3 peak mountain snow flake is used to indicate winter tires

European Tire Labelling

This initiative is aimed at increasing tire safety, environmental and cost efficiency, allowing tire fitters and end users to make more informed decisions based on additional information provided together with the product.



NOISE

External noise is described as an absolute value in decibel and as a 3 classes sound wave symbol.

The noise is a major factor in terms of environmental issue.

The symbol in decibel is usually indicated in the lower part of the tire label.

The label displays sound waves from 1 (lowest noise) to 3 (highest noise).

1 SOUND WAVE

best level performance

2 SOUND WAVES

compliant with European limit - average level performance

3 SOUND WAVES

compliant with European limit - lowest level performance.

All three levels are still compliant with current European limits.



ROLLING RESISTANCE (FUEL EFFICIENCY)

Rolling resistance (RR) is the main key factor in measuring the energy efficiency of a tire and has direct influence on the fuel consumption of a vehicle.



WET GRIP

Wet grip is the most important and demanding safety issue. Driving on wet roads require excellent grip and shorter braking distance.

The wet grip value in the label is an element of braking performance and is, usually, considered by consumers and trade an indicator of safety. G is the minimum level of performance expected.



Tips for a driving



- Regularly check the tire inflation, at least once a month.
- Never reduce the inflation pressure on warm tires.
- Observe tire pressures and loading condition in the operating instructions for each respective axle.
- Do not unscrew the sealing caps.
- Drive at moderate speed on new tires for the first 200 km.
- For tires with speed rating H / V / W / Y / ZR limit the speed to the first 50 km.
- Always check wheel balancing and after assembling the wheels, check the wheel nuts / bolts for a tight fit after approximately 100 km.
- In case of impact caused by holes or other obstacles on the road the tire could suffer a damage which is not visible with the naked eye. In such cases, the tire must be checked internally and externally.
- Regularly check the tread depth of the tires. The lower the tread depth, the higher is the risk of skidding on wet roads. The tread depth must never be less than the legally prescribed minimum value of 1.6 mm. To ensure additional safety, particularly in case of bad weather conditions, tires should be replaced at the tread depth of 3 mm or less.
- To ensure consistently good driving characteristics, the tires should be switched every 10,000 km between front and rear wheels.
- In the case of uneven wear, check the tires and have them replaced if necessary.
- In the case of vehicles which have been parked or laid down for a long period, check the tire pressure and increase it if necessary.



Triangle Tyre Co., Ltd

Via Mauro Macchi, 27
20124 MILAN - ITALY

www.triangle.com.cn

www.triangletyre.de

www.triangletyre.es

www.triangletyre.fr

www.triangletyre.it

info@triangle-eu.com

Download the App

